Ammonia SensoriC NH3 3E 1000 SE



SensoriC NH3 3E 1000 SE

FEATURES

Amperometric 3 electrode sensor cell Low susceptibility to abrupt changes of humidity No CO2 interference High selectivity 0 voltage biased operation

TYPICAL APPLICATIONS

Portable & fixed point applications Food industry, Semiconductor industry, Chemical Industry, General Industry

PART NUMBER INFORMATION

MINI	1854-932-30009
SENSORIC CLASSIC	1854-932-30069
CTL 4 series adaptation	1854-932-30049
CTL 7 series adaptation	1854-932-30079



SensoriC NH3 3E 1000 SE

TECHNICAL SPECIFICATIONS

Measuring Range 0–1000 ppm

Sensitivity Range 8 nA/ppm ± 4 nA/ppm

Zero Current at 20° C $< \pm 40 \text{ nA}$ Resolution at 20° C < 12 ppmBias Potential 0 mV

Linearity < 5% full scale

Response Time at 20°C

< 20 s calculated from 5 min. exposure time
 < 90 s calculated from 5 min. exposure time

Long Term Sensitivity Drift < 10% per 6 months

Operation Conditions

Temperature Range -20°C to +40°C

Humidity Range 15–90% r.H, non–condensing

Effect of Humidity no effect on zero reading

Sensor Life Expectancy > 24 months in air*

Warranty 12 months


Note:



^{*} Background concentrations of ammonia might shorten life time of sensor .

SensoriC NH3 3E 1000 SE


OUTPUT vs. TEMPERATURE:

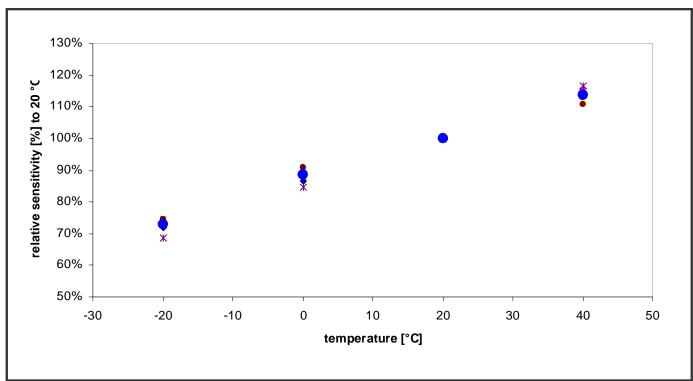



SensoriC NH3 3E 1000 SE

ZERO READING vs. TEMPERATURE:

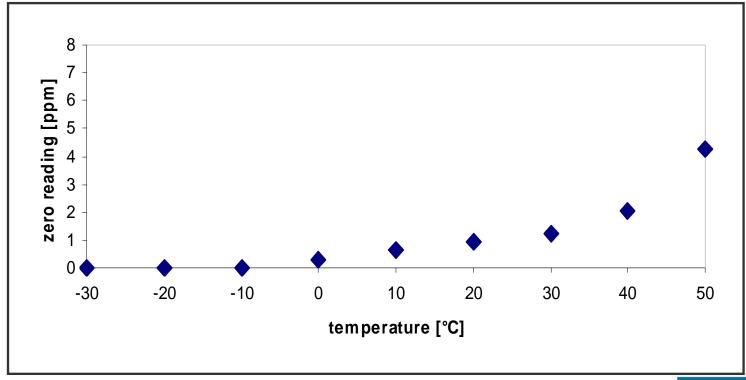



SensoriC NH3 3E 1000 SE

CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Alcohols	1000 ppm	0
Carbon Monoxide	100 ppm	0
Chlorine	5 ppm	0
Nitrogen Dioxide	10 ppm	0
Sulfur Dioxide	20 ppm	-40
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	2

Notes:

- 1. Interference factors may differ from sensor to sensor and with life time. It is not adviseable to calibrate with interference gases.
- 2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

