



2-WAY VACUUM SOLENOID PILOT VALVES

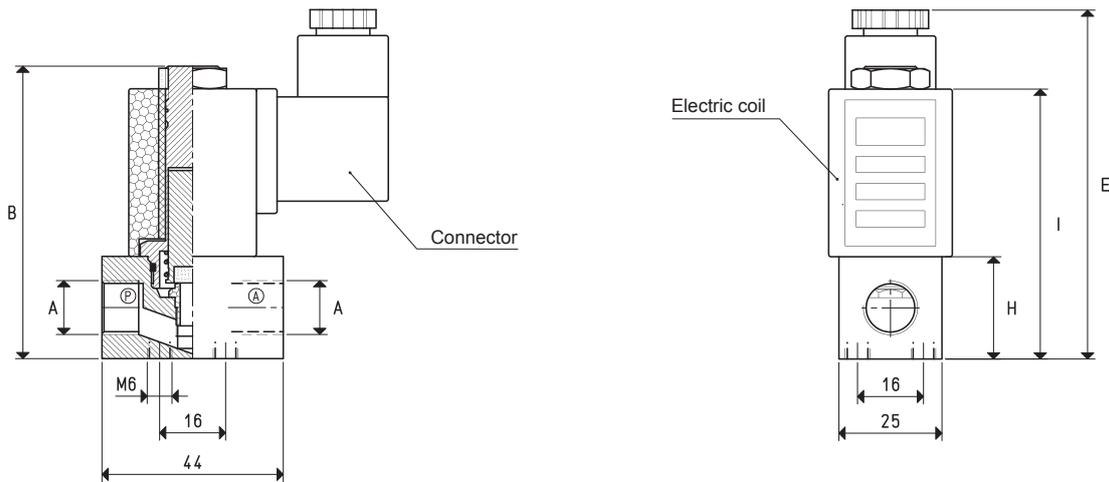

2 / 2 NC



2-WAY SOLENOID PILOT VALVE


Art.	A	Max. capacity	Vacuum level		Reaction time		Ø	Passage section	B	E	H	I	Weight
			min	max	exc.	deexc.							
	Ø	cum/h					orifice	mm ²					g
07 01 20	G1/4"	4	1000	0.5	15	8	6	28.3	73	86	25	67	244

Note: The coil and the connectors are not integral part of the solenoid pilot valves, therefore, they must be ordered separately (See solenoid valve accessories).


Conversion ratio: inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6}$ = $\frac{\text{Kg}}{0.4536}$

GAS-NPT thread adapters available at page 1.117

2-WAY VACUUM SOLENOID PILOT VALVES

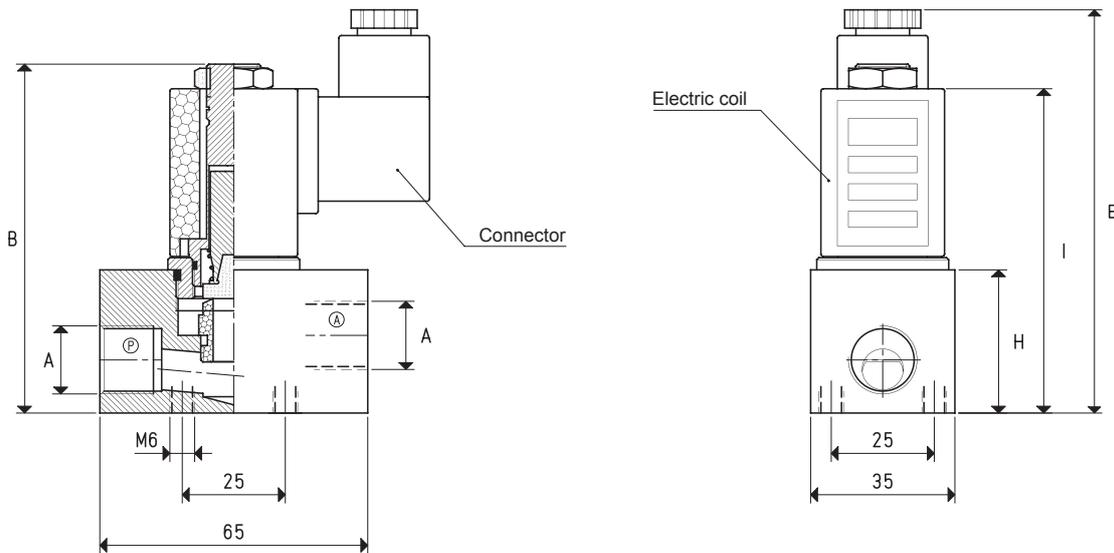

2 / 2 NC



2-WAY SOLENOID PILOT VALVE

Art.	A Ø	Max. capacity cum/h	Vacuum level mbar abs.		Reaction time msec		Ø orifice	Passage section mm ²	B	E	H	I	Weight g
			min	max	exc.	deexc.							
07 02 20	G3/8"	8	1000	0.5	22	10	10	78.5	85	98	35	79	384
07 03 20	G1/2"	10	1000	0.5	28	10	12	113.0	85	98	35	79	372

Note: The coil and the connectors are not integral part of the solenoid pilot valves, therefore, they must be ordered separately (See solenoid valve accessories).